



**HHR-300CH/FT** Cylindrical C size (HR26/50) for back-up use

**Dimensions (with tube) (mm)**

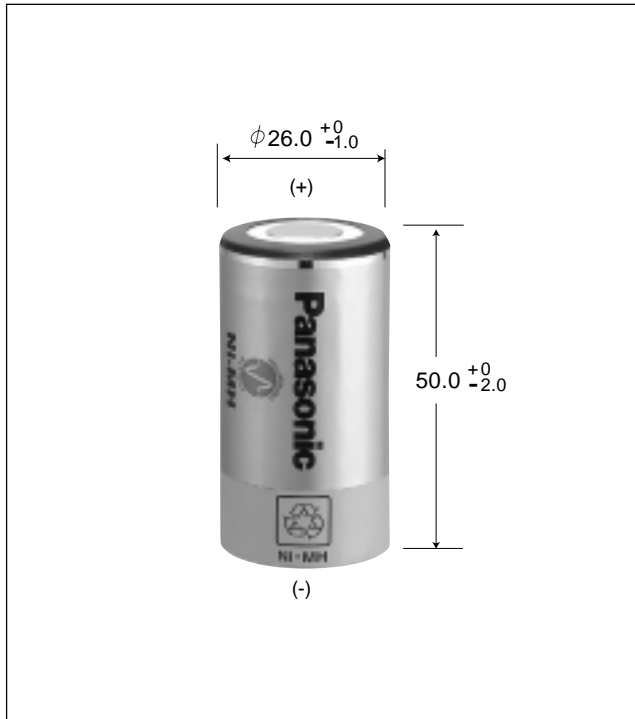


**Typical charge characteristics**

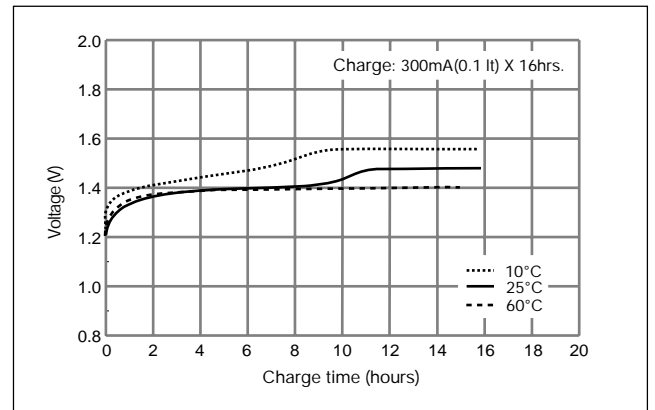

**Specifications**

Diameter	26.0+0 / -1.0mm
Height	50.0+0 / -2.0mm
Approximate Weight	80g

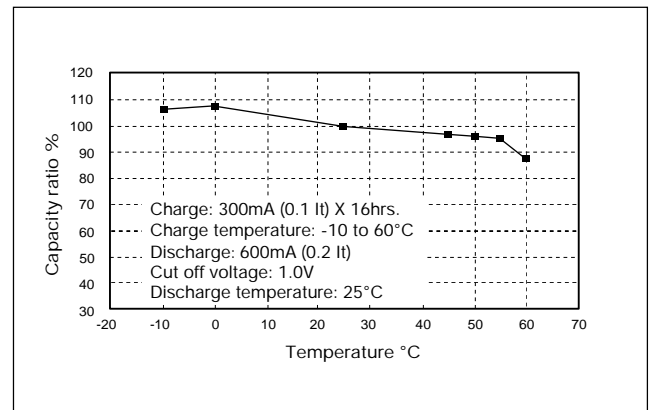

Nominal Voltage		1.2V
Discharge Capacity	Average <sup>*1</sup>	3,300mAh
	Rated (min.)	3,100mAh
Approx. Internal impedance at 1000Hz at charged state.		5m Ω
Charge	Standard	300mA X 16hrs.
	Rapid	1,500mA X 2.4hrs.
	Low rate	150mA X 32hrs. 100mA X 48hrs.
Ambient Temperature	Charge	-10°C to 60°C
	Rapid	-10°C to 60°C
	Low rate	-10°C to 45°C
Discharge		-10°C to 60°C
Storage	<1 year	-20°C to 35°C
	<6 months	-20°C to 45°C
	<1 month	-20°C to 55°C
	<1 week	-20°C to 65°C

\*1 After charging at 0.1It for 16 hours, discharging at 0.2It.

\*2 For reference only.

Battery performance and cycle life are strongly affected by how they are used. In order to maximize battery safety, please consult Panasonic when determining charge/discharge specs, warning label contents and unit design.

\*The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.

**Typical discharge characteristics**

