


HHR-900D/FT Cylindrical D size (HR33/62)

Dimensions (with tube) (mm)

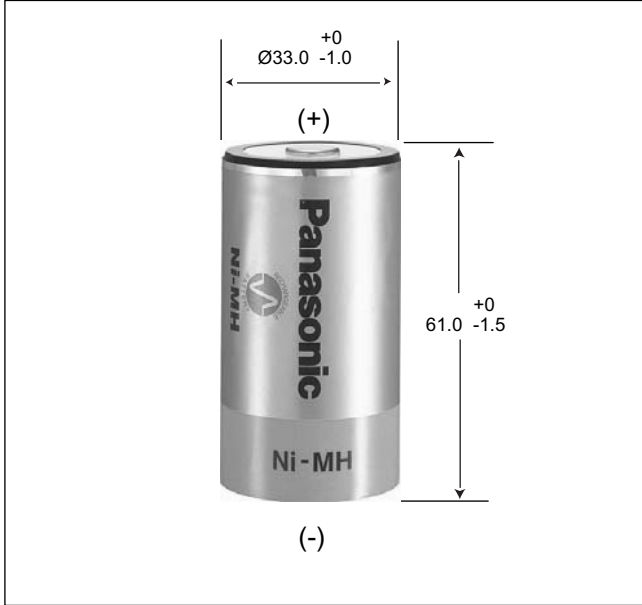

Diameter	33.0 + 0 / - 1.0 mm
Height	61.0 + 0 / - 1.5 mm
Approximate Weight	170g




Specifications

Nominal Voltage		1.2V
Discharge capacity *	Average **	9,000mAh
	Rated (min.)	8,250mAh
Approx. Internal impedance at 1000Hz at charged state.		3.5m Ω
Charge	Standard	900mA X 16hrs.
	Rapid ***	4,500mA X 2.4hrs.
Ambient Temperature	Charge	Standard: 0°C to 45°C Rapid: 0°C to 40°C
	Discharge	-10°C to 65°C
Storage	<1 year	-20°C to 35°C
	<6 months	-20°C to 45°C
	<1 month	-20°C to 55°C

* After charging at 0.1It for 16 hours, discharging at 0.2It.
 ** For reference only.
 *** Need specially designed control system. Please contact Panasonic for data

Battery performance and cycle life are strongly affected by how they are used. In order to maximize battery safety, please consult Panasonic when determining charge/discharge specs, warning label contents and design.

Typical discharge characteristics

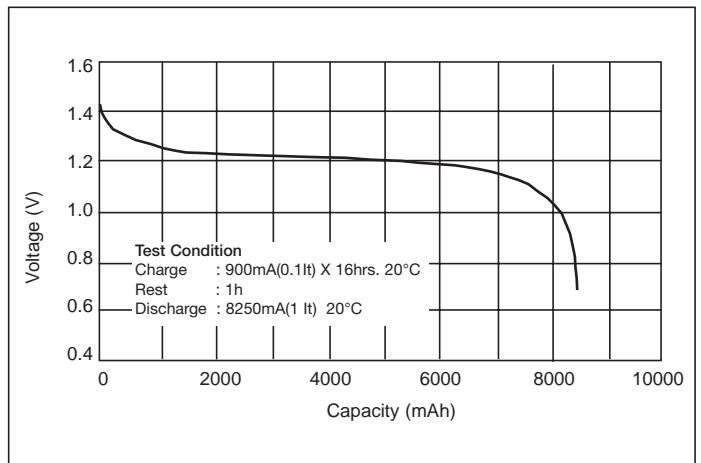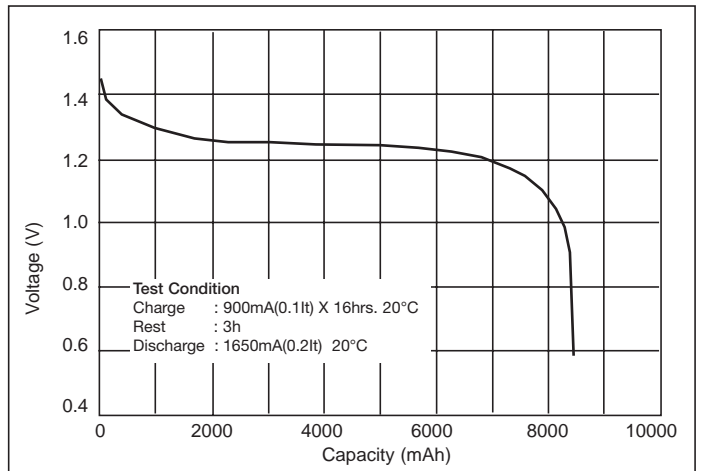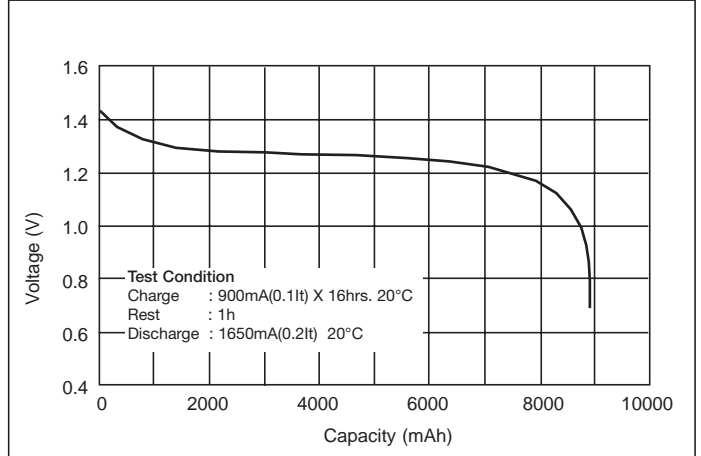

*The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.