

LC-XD1217PG/APG*


For standby power supplies. Expected trickle design life: 10 – 12 years at 20 °C according to Eurobat.

VdS

G104101



Dimensions (mm)

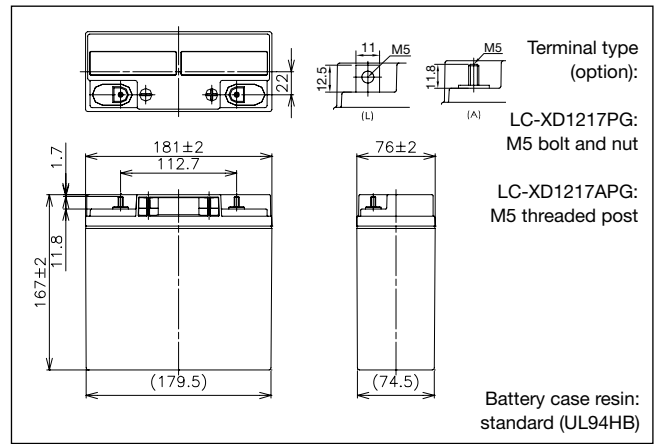

Specifications


Nominal voltage	12 V	
Nominal capacity (20 hour rate)	17 Ah	
Dimensions	Length	181 mm
	Width	76 mm
	Height	167 mm
	Total Height	167 mm
Approx. mass	6.5 kg	
Terminal	M5 Bolt and Nut type/ M5 threaded post	

* This battery is also available with a flame retardant battery case resin (UL94V-0).

Characteristics

Capacity (25 °C)	20 hour rate	17 Ah
	10 hour rate	15 Ah
	5 hour rate	13 Ah
	1 hour rate	10 Ah
Internal resistance	Fully charged battery (25 °C)	12 mΩ
Temperature dependency of capacity (20 hour rate)	40 °C	102 %
	25 °C	100 %
	0 °C	85 %
	-15 °C	65 %
Self discharge (25 °C)	After 3 months	91 %
	After 6 months	82 %
	After 12 months	64 %

Duration of discharge vs Discharge current

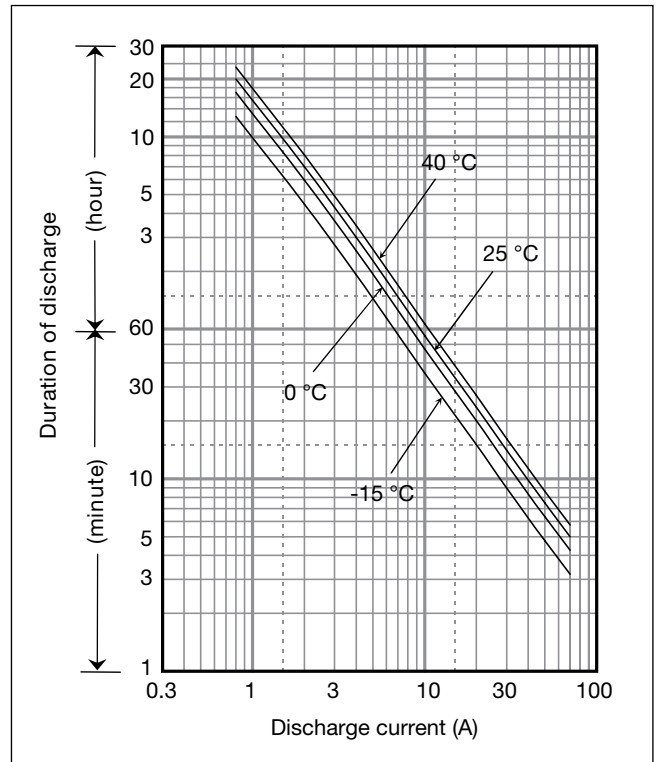

Watt Table

(Wattage/Battery)

Cut-off V	3min	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	10h	20h	24h
9.6V	1021	806	526	402	337	251	177	142	97.6	75.5	56.2	43.2	35.6	28.6	19.0	10.3	8.58
9.9V	948	756	516	399	331	249	176	142	95.6	74.9	55.9	42.9	35.4	28.5	18.9	10.3	8.56
10.2V	874	708	502	391	326	246	175	139	93.7	73.0	55.4	42.6	35.1	28.3	18.7	10.2	8.53
10.5V	777	634	465	364	309	240	172	136	91.7	70.4	54.5	42.3	34.8	28.0	18.6	10.2	8.50
10.8V	656	561	415	339	301	232	169	134	89.2	67.1	53.4	41.8	33.9	27.5	18.4	10.1	8.44

Ampere Table

(Ampere/Battery)

Cut-off V	3min	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	10h	20h	24h
9.6V	91.8	72.2	47.0	34.9	29.0	21.5	15.1	12.0	8.26	6.37	4.72	3.61	2.97	2.39	1.58	0.86	0.72
9.9V	85.2	67.8	46.0	34.7	28.6	21.2	15.0	12.0	8.10	6.33	4.70	3.59	2.95	2.38	1.57	0.85	0.71
10.2V	78.6	63.5	44.9	34.0	28.1	21.0	14.9	11.8	7.93	6.16	4.65	3.57	2.93	2.36	1.56	0.85	0.71
10.5V	69.9	56.9	41.6	31.6	26.7	20.5	14.6	11.6	7.77	5.95	4.58	3.54	2.90	2.33	1.55	0.85	0.71
10.8V	59.0	50.3	37.1	29.5	26.0	19.8	14.4	11.3	7.56	5.67	4.49	3.49	2.83	2.29	1.53	0.85	0.70


Charging Method

Trickle use	Control voltage: 13.6 - 13.8 V; Initial current: 2.55 A or smaller
-------------	---


Cut off voltage

Discharge current	0.85 A - 3.4 A	3.4 A - 8.5 A	8.5 A - 17 A	17 A - 34 A	34 A - 51 A
Cut off voltage (V)	10.5	10.2	9.9	9.3	8.7


Influence of Temperature on Trickle life

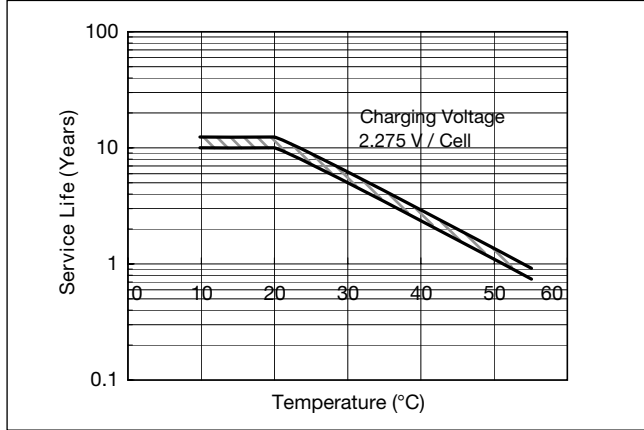


Residual capacity vs storage period

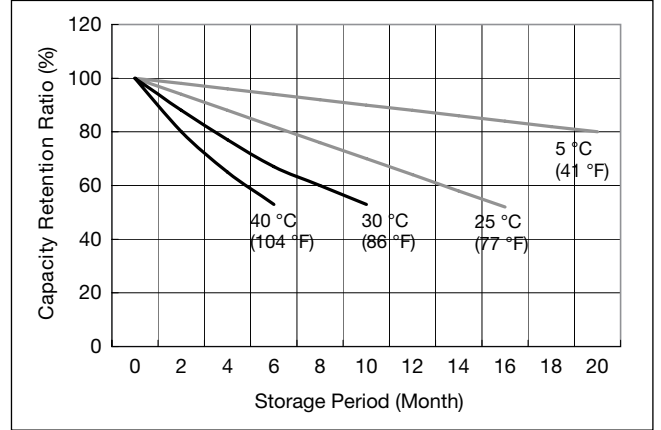

Constant-voltage and constant-current charge characteristics for Trickle use

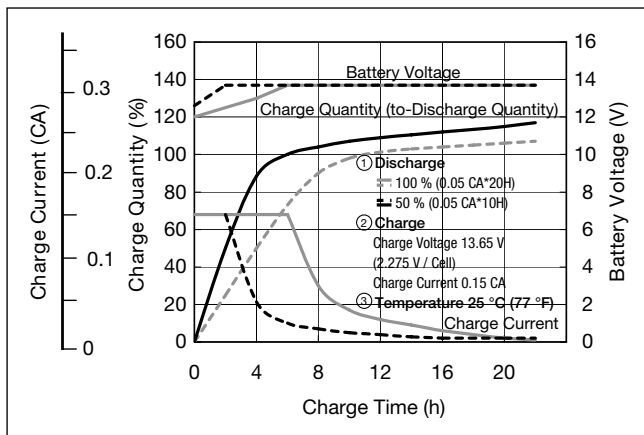

Discharge capacity by temperature and by discharge current

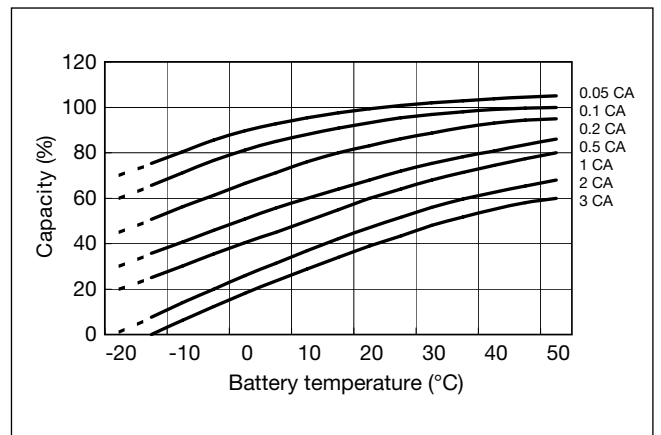

Discharge characteristics

