


ML414R

■ Dimensions(mm)

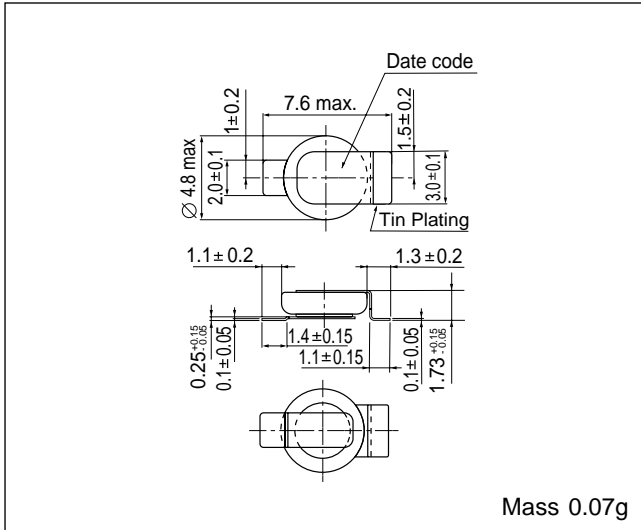


■ Specification

Nominal voltage(V)	3	
Nominal capacity(mAh)	0.8* ¹	1.0* ²
Continuous drain(mA)	0.005	
Operating temperature(°C)	-20 ~ +60	


*1 Nominal Capacity shown above is based on standard drain and cut off voltage down to 2.0V at 20°C.

*2 Nominal Capacity shown above is based on standard drain and cut off voltage down to 1.5V at 20°C.

■ Discharge characteristics

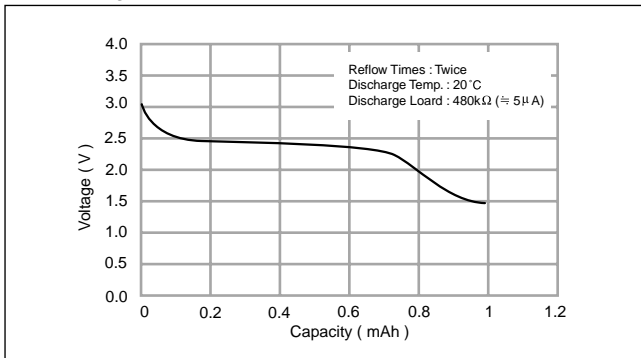


■ Charge Voltage vs. Discharge capacity

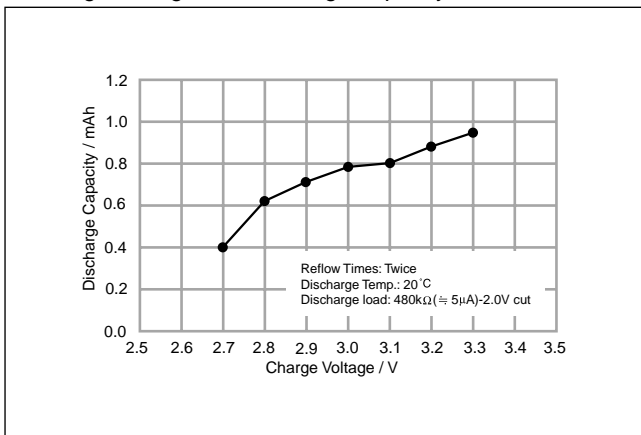

ML614R

■ Dimensions(mm)

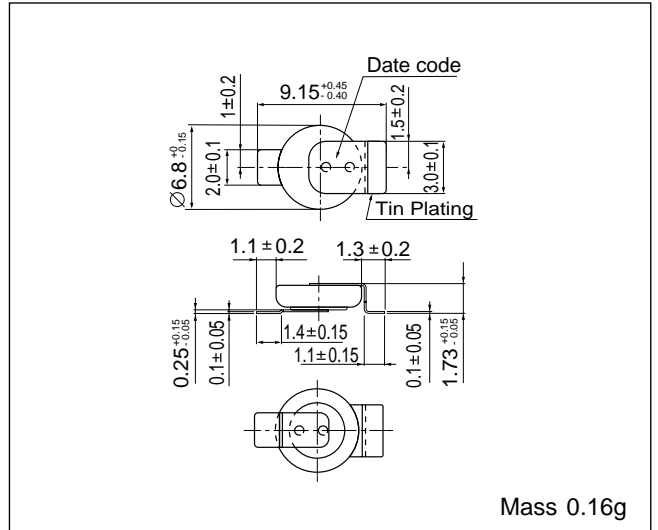

■ Specification

Nominal voltage(V)	3	
Nominal capacity(mAh)	2.5* ¹	3.0* ²
Continuous drain(mA)	0.01	
Operating temperature(°C)	-20 ~ +60	

*1 Nominal Capacity shown above is based on standard drain and cut off voltage down to 2.0V at 20°C.

*2 Nominal Capacity shown above is based on standard drain and cut off voltage down to 1.5V at 20°C.

■ Discharge characteristics

