


# P-120SCJS

## Dimensions (with tube) (mm)

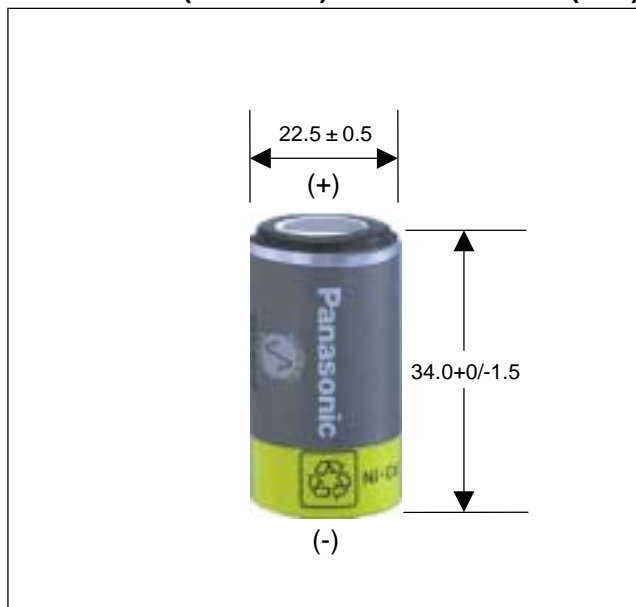

Diameter	<b>22.5 ± 0.5 mm</b>
Height	<b>34.0 + 0 / - 1.5 mm</b>
Approx. Weight	<b>37g</b>

## Specifications


Nominal Voltage		<b>1.2V</b>	
Discharge Capacity *	Average **	<b>1300mAh</b>	
	Rated (Min.)	<b>1200mAh</b>	
Approx. Internal impedance at 1000Hz at charged state.		<b>6m</b>	
Charge	Standard	<b>120mA(0.1It) × 16 hours</b>	
	Rapid	<b>1200mA(1It) × 1.5 hours</b>	
Ambient Temperature	Charge	Standard	<b>0 to +45</b>
		Rapid	<b>10 to +40</b>
	Discharge		<b>-20 to +65</b>
Storage	within 2 years	<b>-20 to +35</b>	
	within 6 months	<b>-20 to +45</b>	

\* 0.2C discharge capacity after charging at 0.1C for 16 hours.

\*\* For reference only.

Battery performance and cycle life are strongly affected by how they are used. In order to maximize battery safety, please consult Panasonic when determining charge / discharge specs, warning label contents and design.

## Typical Charge Characteristics

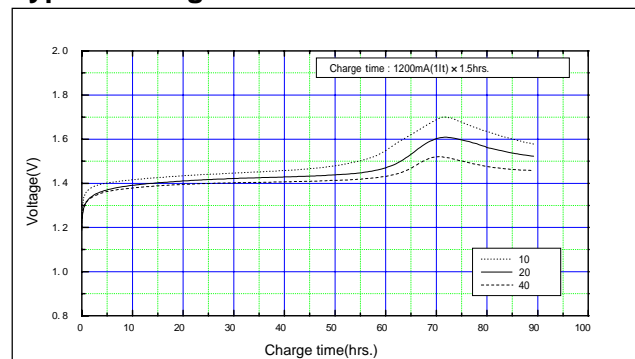

## Typical Discharge Characteristics

