


P-130SCS

Dimensions (with tube) (mm)

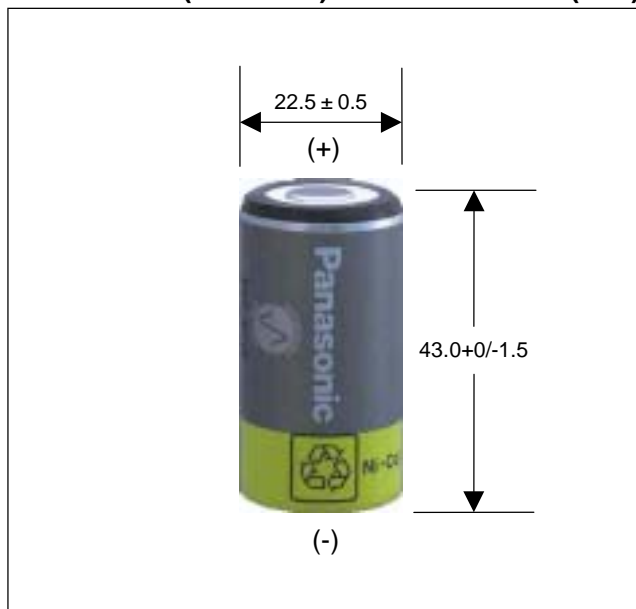

Diameter	22.5 ± 0.5 mm
Height	43.0 + 0 / - 1.5 mm
Approx. Weight	44g

Specifications


Nominal Voltage		1.2V	
Discharge Capacity *	Average **	1450mAh	
	Rated (Min.)	1300mAh	
Approx. Internal impedance at 1000Hz at charged state.		6m	
Charge	Standard	130mA(0.1It) × 16 hours	
	Rapid	1300mA(1It) × 1.5 hours	
Ambient Temperature	Charge	Standard	0 to +45
		Rapid	10 to +40
	Discharge		-20 to +65
	Storage	within 2 years	-20 to +35
within 6 months		-20 to +45	

* 0.2C discharge capacity after charging at 0.1C for 16 hours.

** For reference only.

Battery performance and cycle life are strongly affected by how they are used. In order to maximize battery safety, please consult Panasonic when determining charge / discharge specs, warning label contents and design.

Typical Charge Characteristics

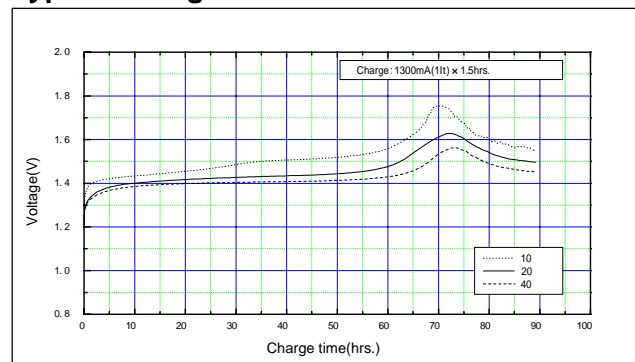

Typical Discharge Characteristics

