



**Warning:**

Fire, Explosion and Severe Burn Hazards.  
Do not Recharge, Crush, Disassemble, Heat above 212 °F(100 °C), Incinerate, or Expose Contents to Water.


Discharge Characteristics @ +20 °C

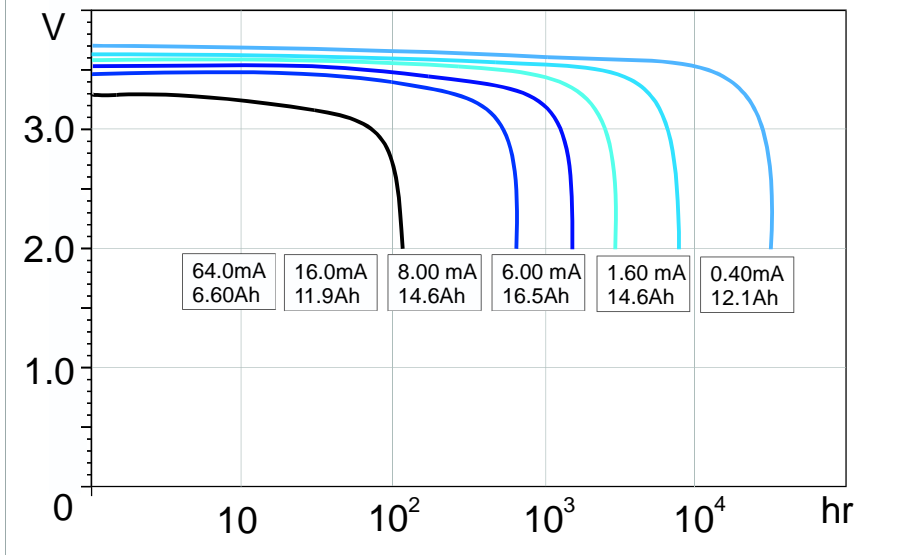

Capacity vs. Current

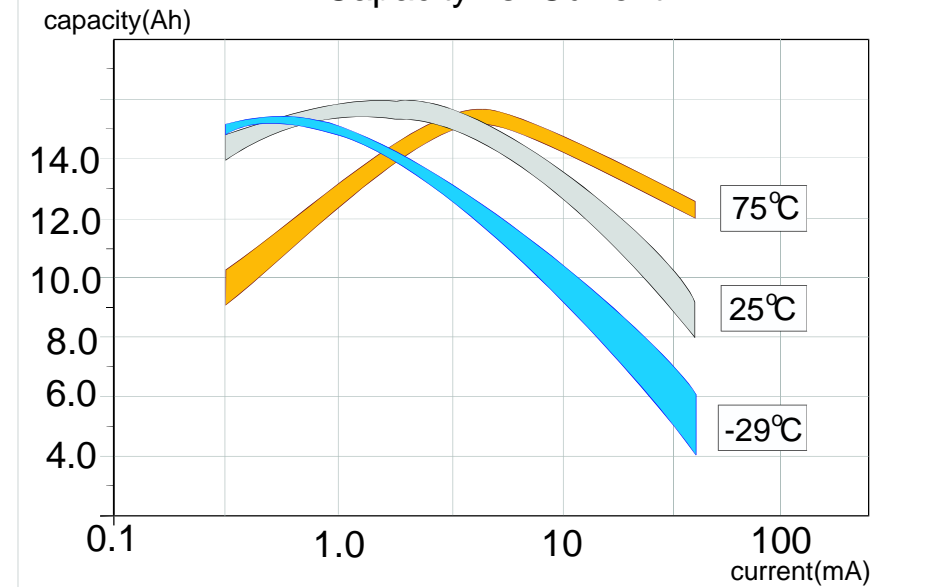

Capacity vs. Temperature



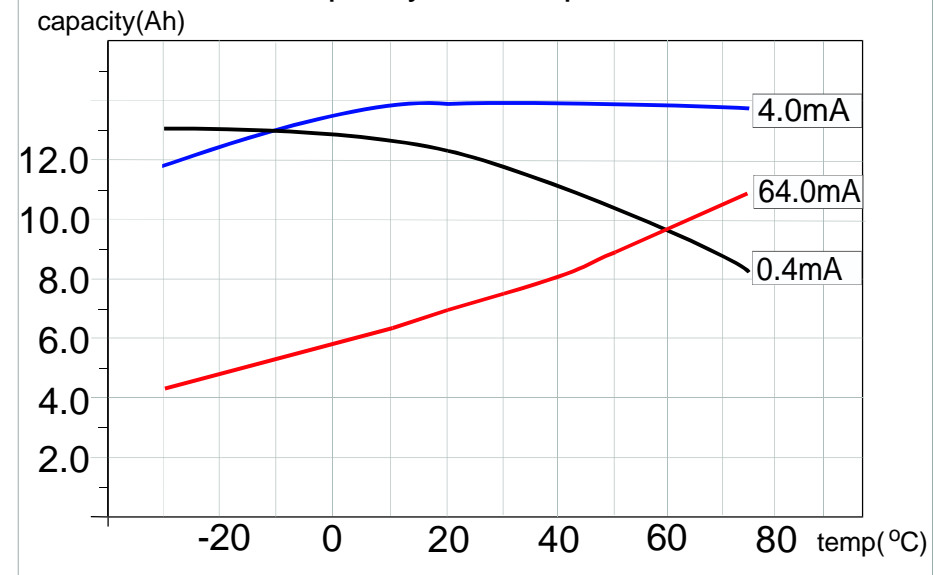






## Transient Minimum Voltage Characteristics

### A Solution for the Initial Voltage Delay

It is necessary to apply a load similar or greater than the maximum current used by the application for the period of more than 1 second, 1 to 3 times prior to the operation of the application to eliminate the initial voltage delay caused by the passivation. Once the depassivation is obtained, standby current of  $2\mu\text{A}/\text{cm}^2$  ( $80\mu\text{A}$ ) for the interface area of the electrodes is suitable to optimize further operation of the application without failure.

### Transient Minimum Voltage Characteristics

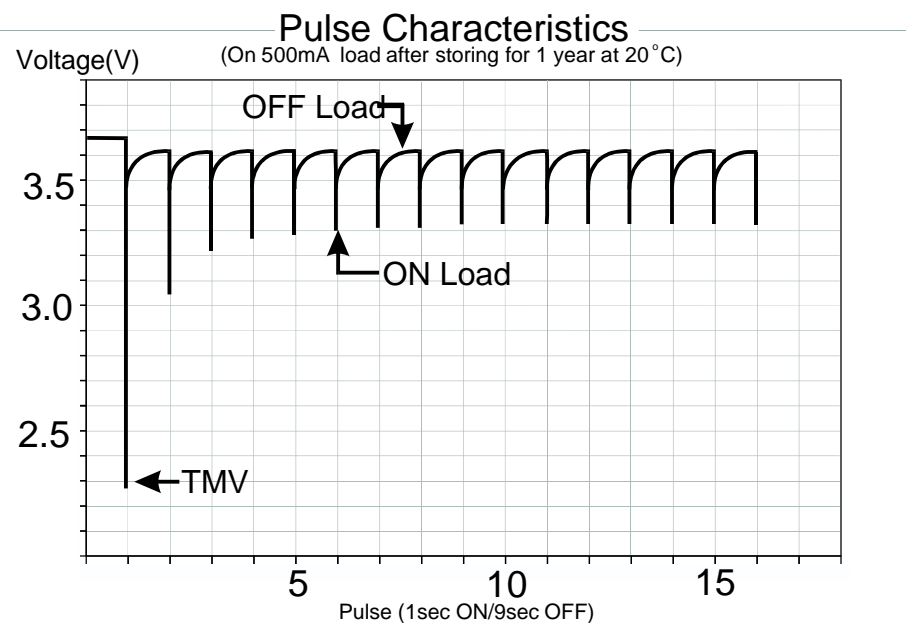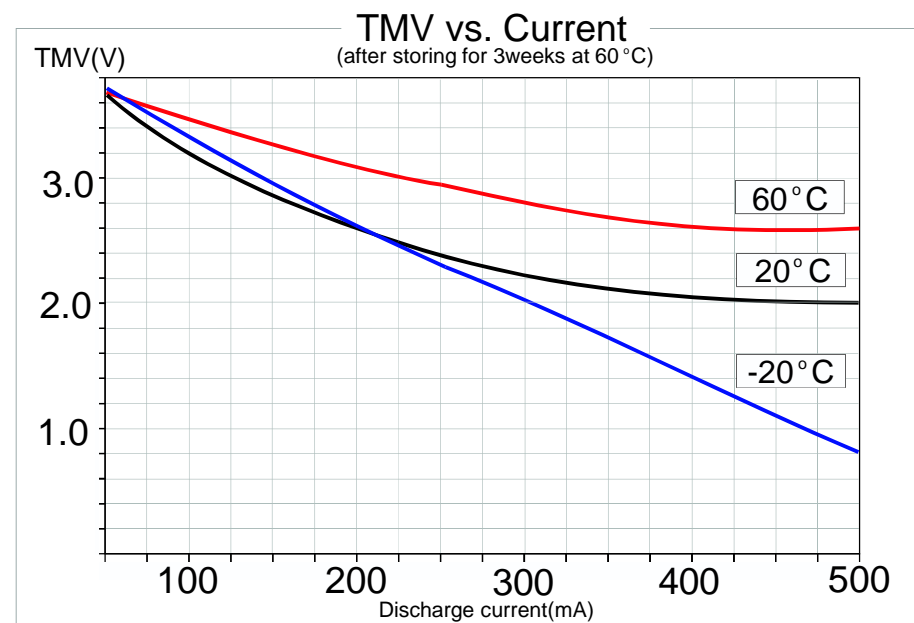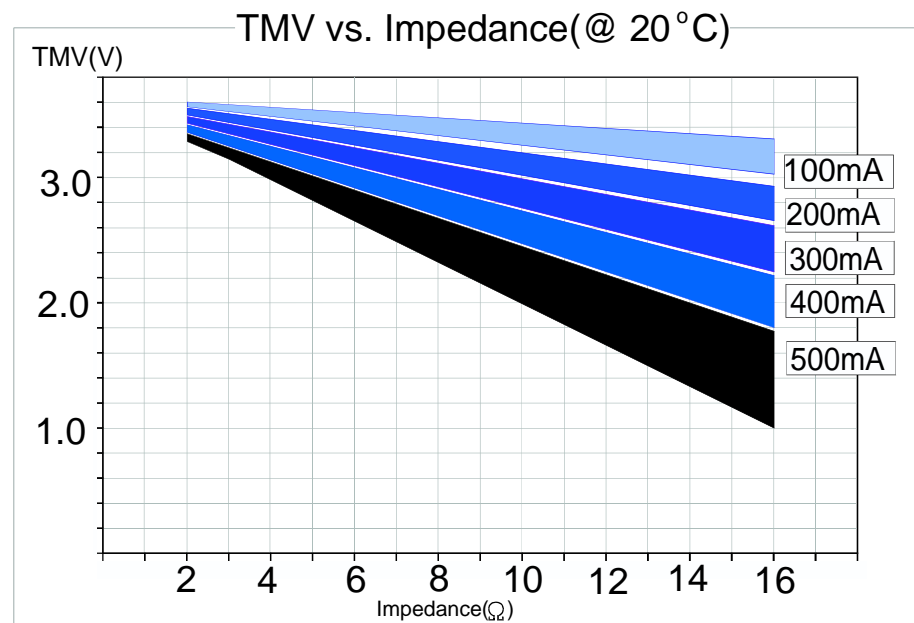

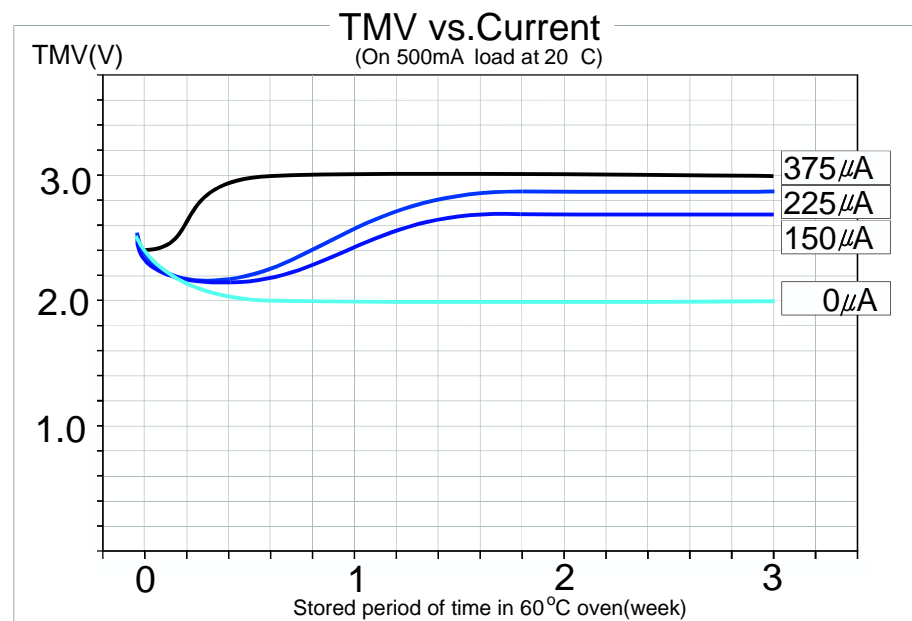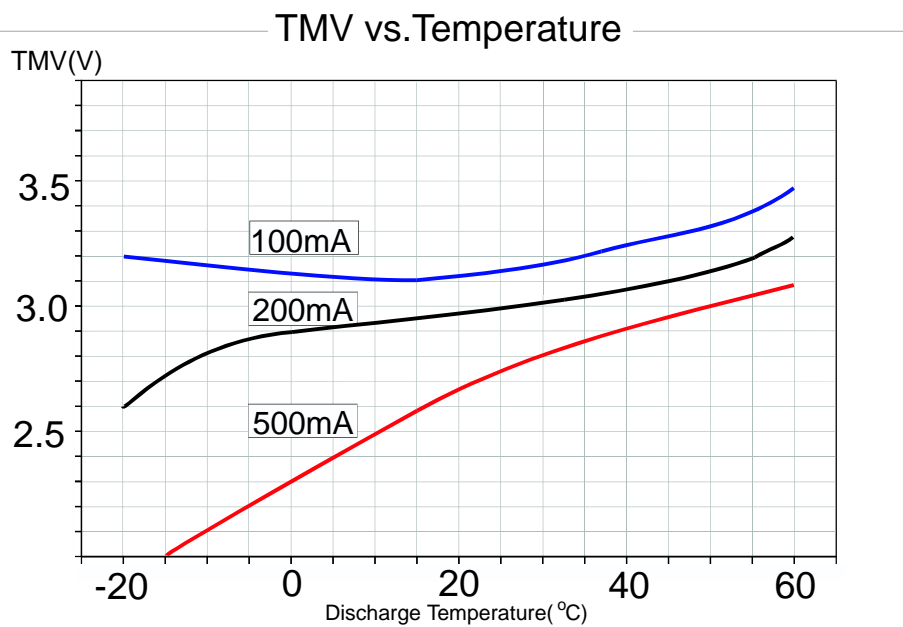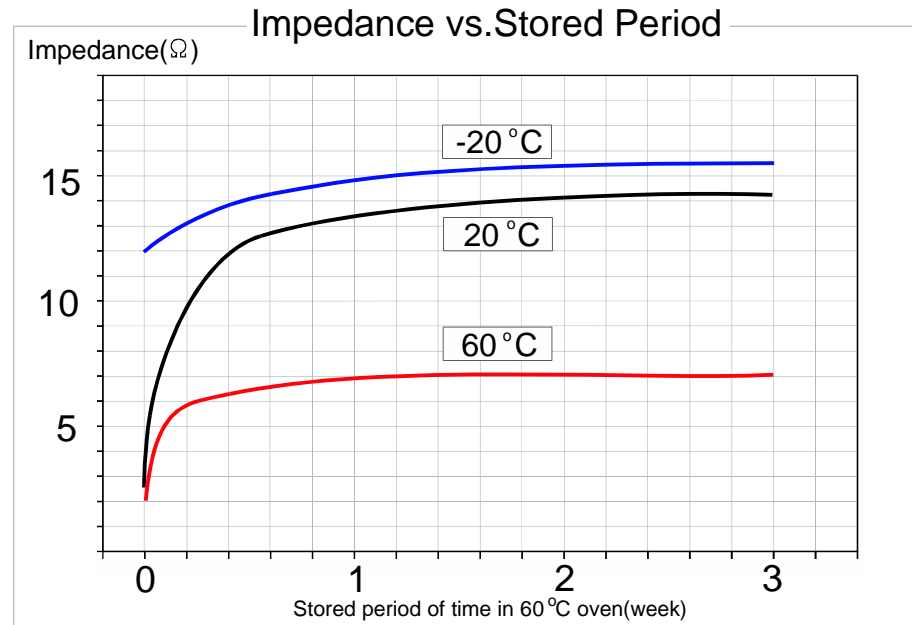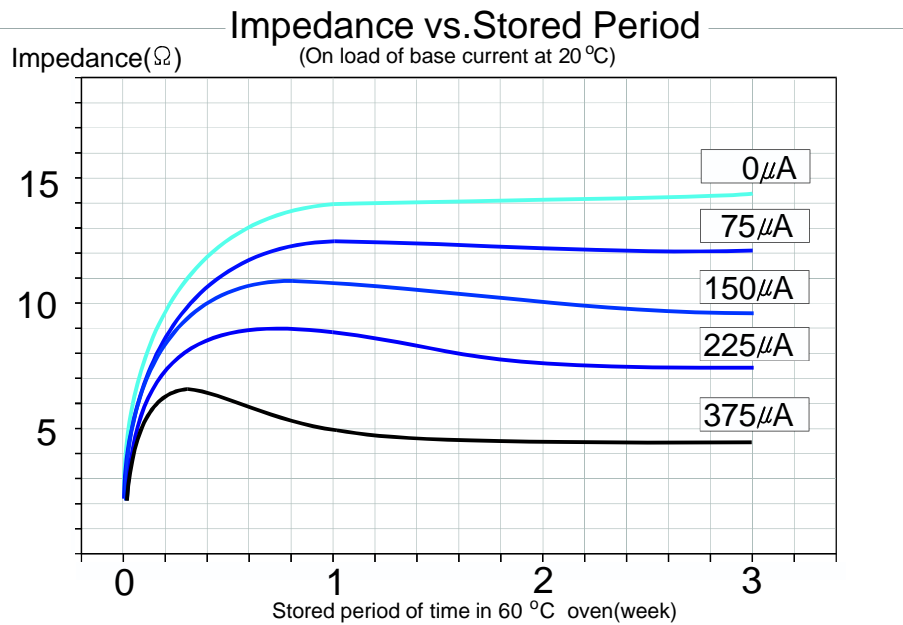

### Available Terminations;

