



HHR-260SCP/FT Cylindrical SC size (HR23/43)

Dimensions (with tube) (mm)

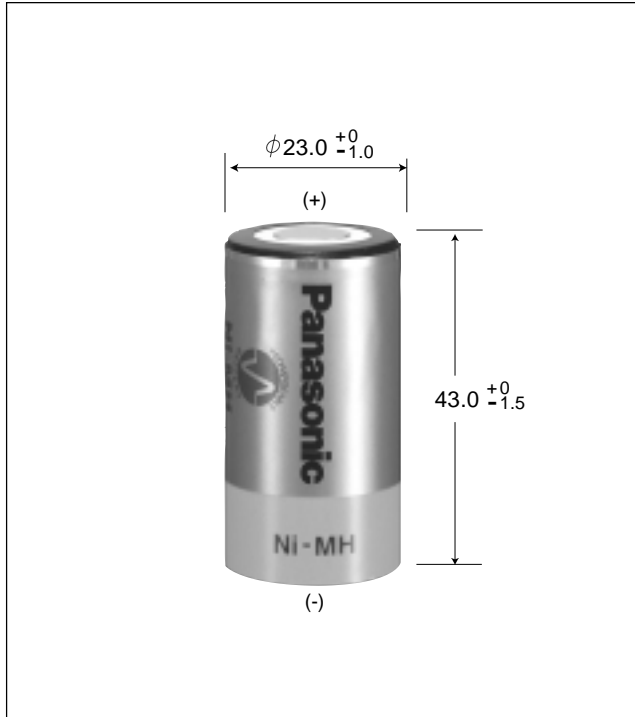

Typical charge characteristics

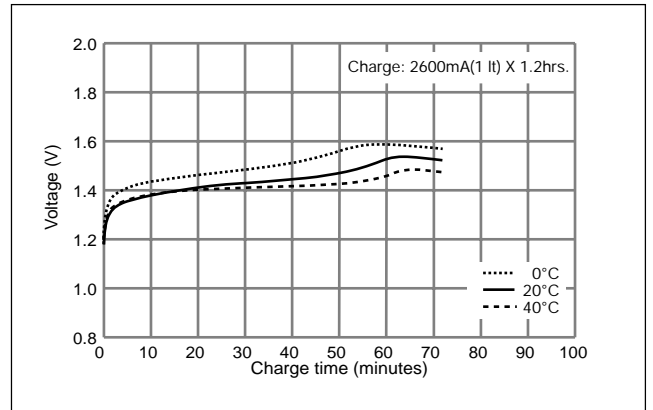

Specifications



Diameter	23.0+0 / -1.0mm
Height	43.0+0 / -1.5mm
Approximate Weight	55g

Nominal Voltage		1.2V
Discharge Capacity	Average ^{*1}	2,600mAh
	Rated (min.)	2,450mAh
Approx. Internal impedance at 1000Hz at charged state.		5mΩ
Charge	Standard	260mA X 16hrs.
	Rapid	2,600mA X 1.2hrs.
Ambient Temperature	Charge	Standard: 0°C to 45°C Rapid: 10°C to 40°C
	Discharge	-10°C to 65°C
	Storage	<1 year: -20°C to 35°C <3 months: -20°C to 45°C <1 month: -20°C to 55°C

*1 After charging at 0.1It for 16 hours, discharging at 0.2It.
*2 For reference only.

Battery performance and cycle life are strongly affected by how they are used. In order to maximize battery safety, please consult Panasonic when determining charge/discharge specs, warning label contents and unit design.

Typical discharge characteristics

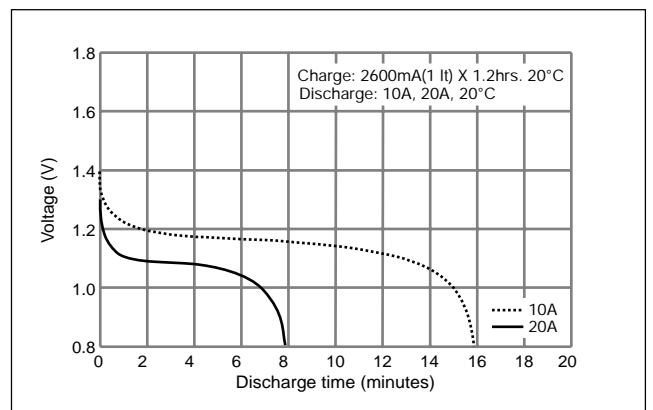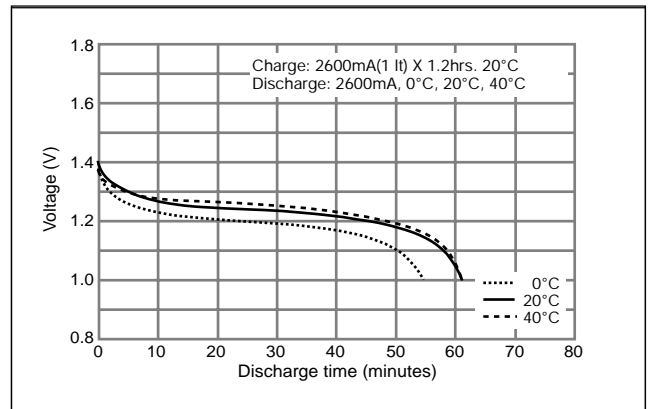

*The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.